

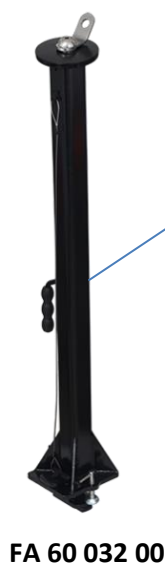
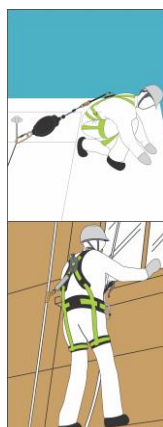


Transport bag
included

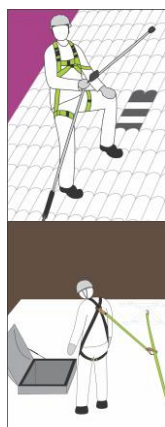


FA 60 032 00

FA 60 007 03
+
2x FA 60 032 00
(not included)

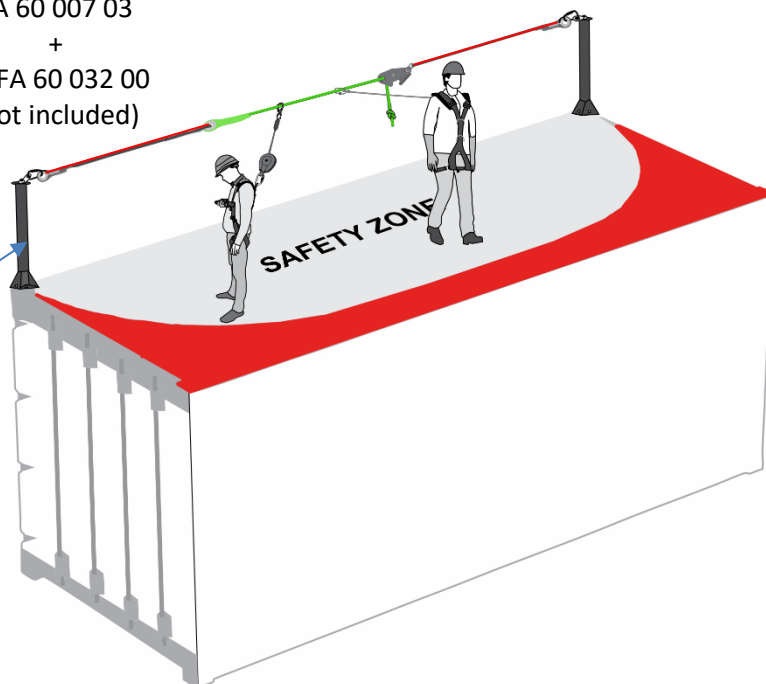

HS CODE
6307909899
CARTON SIZE / PCS.
40x40x24 cm / 1
Technical Report N°SPC0299146/2025 Issue 3
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 007 03
CE	PPE regulation (EU) 2016/425 Annex II using EN 795 Type C TS 16415 Type C
	x2
MAT.	 16 mm PES
R (kN) / MBS (kN)	18 kN / 23 kN
MAT.  / 	 / 
LG. / f MIN. → MAX.	5.0 m → 14.0 m / 1.40 m → 2.80 m
	ISO Container (20'/40')
+	FA 60 032 00 (x2)
	14.11 KG



R (kN) / MBS (kN)

Nombre d'utilisateurs
 Number of users
Cantidad de usuarios
 Quantità di utilizzatori
Anzahl der Benutzer



Matière connecteur / tendeur
 Material of connector / tensioner
Material del conector / tensor
 Materia del connetore / tenditore
Material Verbinder / Spanner

+

Peut être utilisé avec
 Can be used with
Se puede usar con
 Ad essere utilisato con
Verwendet werden soll mit

Résistance statique (en kN) / Résistance à la rupture
 Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
 Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

LG. / f MIN. MAX.

Longueur mini → maxi / Flèche mini → maxi
 Min. → Max. length / Min. → Max. deflection
Longitud mínima → máxima / Flecha mínima → máxima
 Lunghezza min. → max. / Flessione min. → max.
Länge min. → max. / Dirchhang min. → max.