
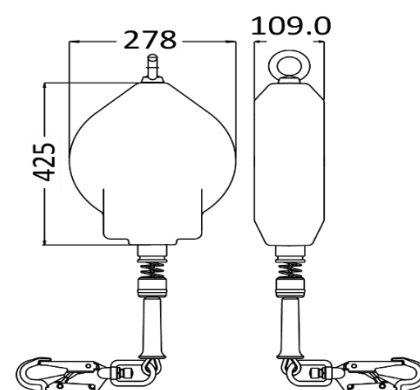



HS CODE
8428 90 90
CARTON SIZE / PCS.
60 x 40 x 24 cm / 4
FA 20 400 25/30 : AET N°2777/10827-02/E02-01 FA 20 400 30S : AET N°2777/10827-02/E07-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16089-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom
ACKNOWLEDGEMENT OF RECEIPT N°3975/1/2018 (ATEX)
Technická Inšpekcia, a.s. N°1354 Trnavská cesta 56, 821 01 Bratislava, Slovenská Republika



REF.	FA 20 400 25 FA 20 400 30	FA 20 400 30S
LG.  KG	25 m 30 m	30 m
CE	MAX. 140 KG	MAX. 140 KG
MAT.  	Polyamide 6 - 30% fiber glass  STEEL Ø 4.5 mm	 INOX Ø 4.5 mm
	 STEEL FA 50 101 17 / FA 50 203 20 with fall indicator	 STEEL /  INOX FA 50 101 17 / stainless steel connector with fall indicator
 360°	x2	
R(kN)	12 kN	
	NO	
+	ATEX Zone 1	
 Kg	12.50 KG 13.25 KG	13.25 KG

LG.


KG

Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers

MAT.



Matière carter / câble
Material of casing / wire rope
Material cárter / cable
Material dei carter / Cavo
Material Gehäuse / Seil



Matière connecteur haut / connecteur bas
Material of top connector / bottom connector
Material conector alto / conector bajo
Materiale connettore alto / connettore basso
Material oberes / unteres Verbindungselement


360°

Nombre d'émerillons
Number of swivels
Cantidad de eslabones giratorios
Numero di tornichetti
Anzahl der Wirbel



Homologué pour le travail à proximité d'arêtes vives
Approved for work near sharp edges
Homologado para trabajo cerca de aristas vivas
Omologato per lavoro in prossimità di spigoli vivi
Zugelassen für Arbeiten in der Nähe scharfer Kanten