






FA 20 104 XX

P. 1|2

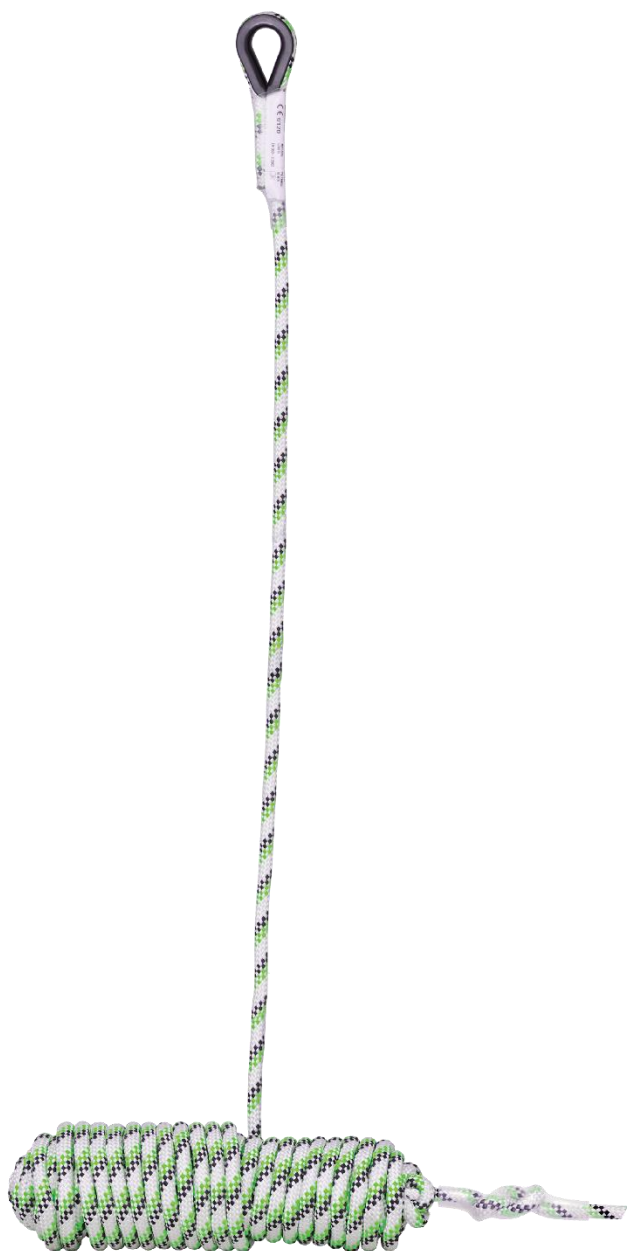

HS CODE
56090090
CARTON SIZE / PCS.
FA 20 104 10 : 60 x 40 x 24 cm / 10
FA 20 104 20 : 40 x 40 x 24 cm / 5
FA 20 104 30 : 60 x 40 x 24 cm / 5
FA 20 104 40 : 80 x 40 x 24 cm / 5
FA 20 104 50 : 80 x 40 x 24 cm / 5
AET N° 2777/10847-02/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland




REF.	FA 20 104 10	FA 20 104 20	FA 20 104 30	FA 20 104 40	FA 20 104 50
LG.  KG	10m	20 m	30 m	40 m	50 m
CE	MAX. 140 KG EN 353-2 : 2002				
MAT.	Polyester Ø 12 mm				
	NO				
	---				
R(kN)	15 kN				
	1.71 kg	2.76 kg	3.81 kg	4.86 kg	5.91 kg

LG.




KG

Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers



Coulisseau doté d'un point fixe
Rope grab with a fixed point lock
Corredera provista de punto fijo
Guida a punto fisso
Gleitelement mit Festpunkt



Matière connecteur
Material of connector
Material conector
Materiale connettore
Material des Verbinders